





FX-1200 Specifications

Airflow	1200 cfm
Fits machines with enclosure volume of:	120 cubic feet or larger
Motor	3 HP, 3-Phase, 50/60 Hz. Voltage & Current @ 60Hz. 208V – 8.8A 230V – 8.2A 460V – 4.1A
Weight	64 lbs.
Noise Level	72 dBA
Inlet Diameter	8"

Mounting Options – FX-1200

Direct Mount	use 30304 – FX-1200 Direct Mount Kit
Floor Stand	use 30315 – Floor Stand "B"
Machine Top Stand	use 30314 – Machine Stand "B"
Wall Mount	use 30320 – Wall Bracket "B"
Machine Side Mount	N/A
Suspended	use 30310 – Suspension Kit "B"

- For use on enclosed machines with an internal volume of 120 cu. ft. or larger.
- Popular for machines requiring Y-junction and two intake points.
- Excellent choice for large machining centers.
- Unit can be mounted directly to the machine, on stands, on brackets, or suspended. See pages 12–13 for mounting options.

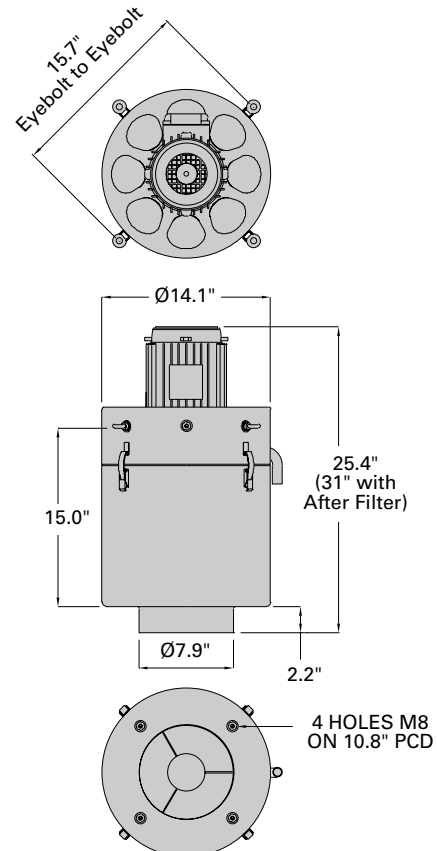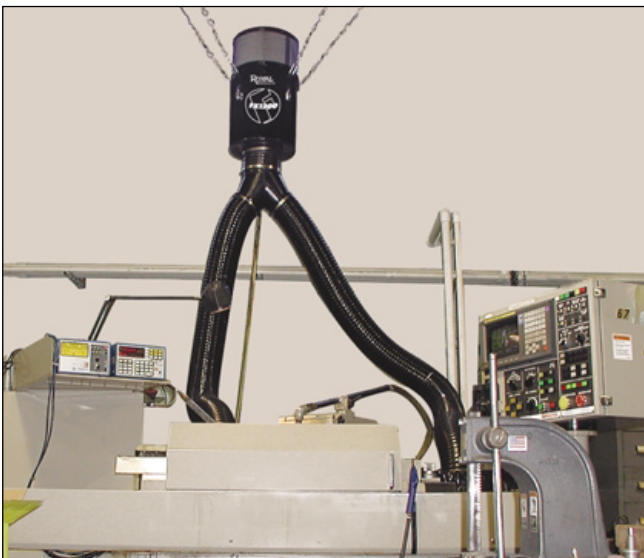



















Filtermist Units

Description	Cat. No.	Price
FX-1200 Filtermist Unit Order performance and mounting accessories separately.	30130	\$2,395
FX-1200 Stainless Steel Unit See page 10 for additional information.	30170	\$4,065

Performance Accessories

Description	Cat. No.	Price
 After Filter "B" Used for collecting dry smoke and very fine mist particles.	30205	\$234
 Cyclonic Swarf Separator For use on applications such as grinding and cast iron machining where very fine solid particles are entrained in the mist stream. Also acts as a great pre-filter for high pressure coolant applications.	30210	\$643
 Noise Attenuator Decreases the noise level by approximately 5 dB. Cannot be used in conjunction with after filters.	30215	\$483
 Chip Deflector Protects intake from coolant splash and chips.	30220	\$44

Mounting Accessories

Description	Cat. No.	Price
 Direct Mount Kit (FX-1200) Includes 8" collar seal, set of rigid mounting studs, and hardware.	30304	\$97
 Floor Stand "B" Adjusts from 6 ft. to 9 ft. Bolts to floor for safety.	30315	\$719
 Machine Top Stand "B" 3 ft. tall stand bolts to the top of a machine.	30314	\$453
 Wall Bracket "B" Can be used to mount unit to a wall or other suitable mounting surface.	30320	\$279
 Suspension Kit "B" Includes 30 ft. of chain, 4 eyebolts, 8 split links, and 1 adjustable link.	30310	\$98
 Oil Return Hose 3/4" diameter.	30335	\$3 per ft.
 Ducting Flexible vinyl with heavy wire support.	8" 30344 6" 30342 4" 30340	\$11 per ft. \$9 per ft. \$8 per ft.
Warning — never use sheetmetal ducting or any other type that could leak and cause a hazardous condition.		
 Hose Clamps For securing ducting to accessories.	8" 30354 6" 30352 4" 30350	\$5 \$5 \$4
 Y-Junctions For multiple pickup locations.	A B 8" 6" 30368 8" 4" 30366 6" 6" 30364 6" 4" 30362 4" 4" 30360	\$231 \$283 \$213 \$203 \$168
 Flange Adapters For securing ducting directly to an enclosed machine.	8" 30374 6" 30372 4" 30370	\$61 \$56 \$49
 Reducers	A B 8" 6" 30382 6" 4" 30380	\$93 \$88
 Fishtails For use on open machines.	A B 8" 11.75" x 5" 30394 6" 10" x 4.5" 30392 4" 8.25" x 3.5" 30390	\$167 \$149 \$137