

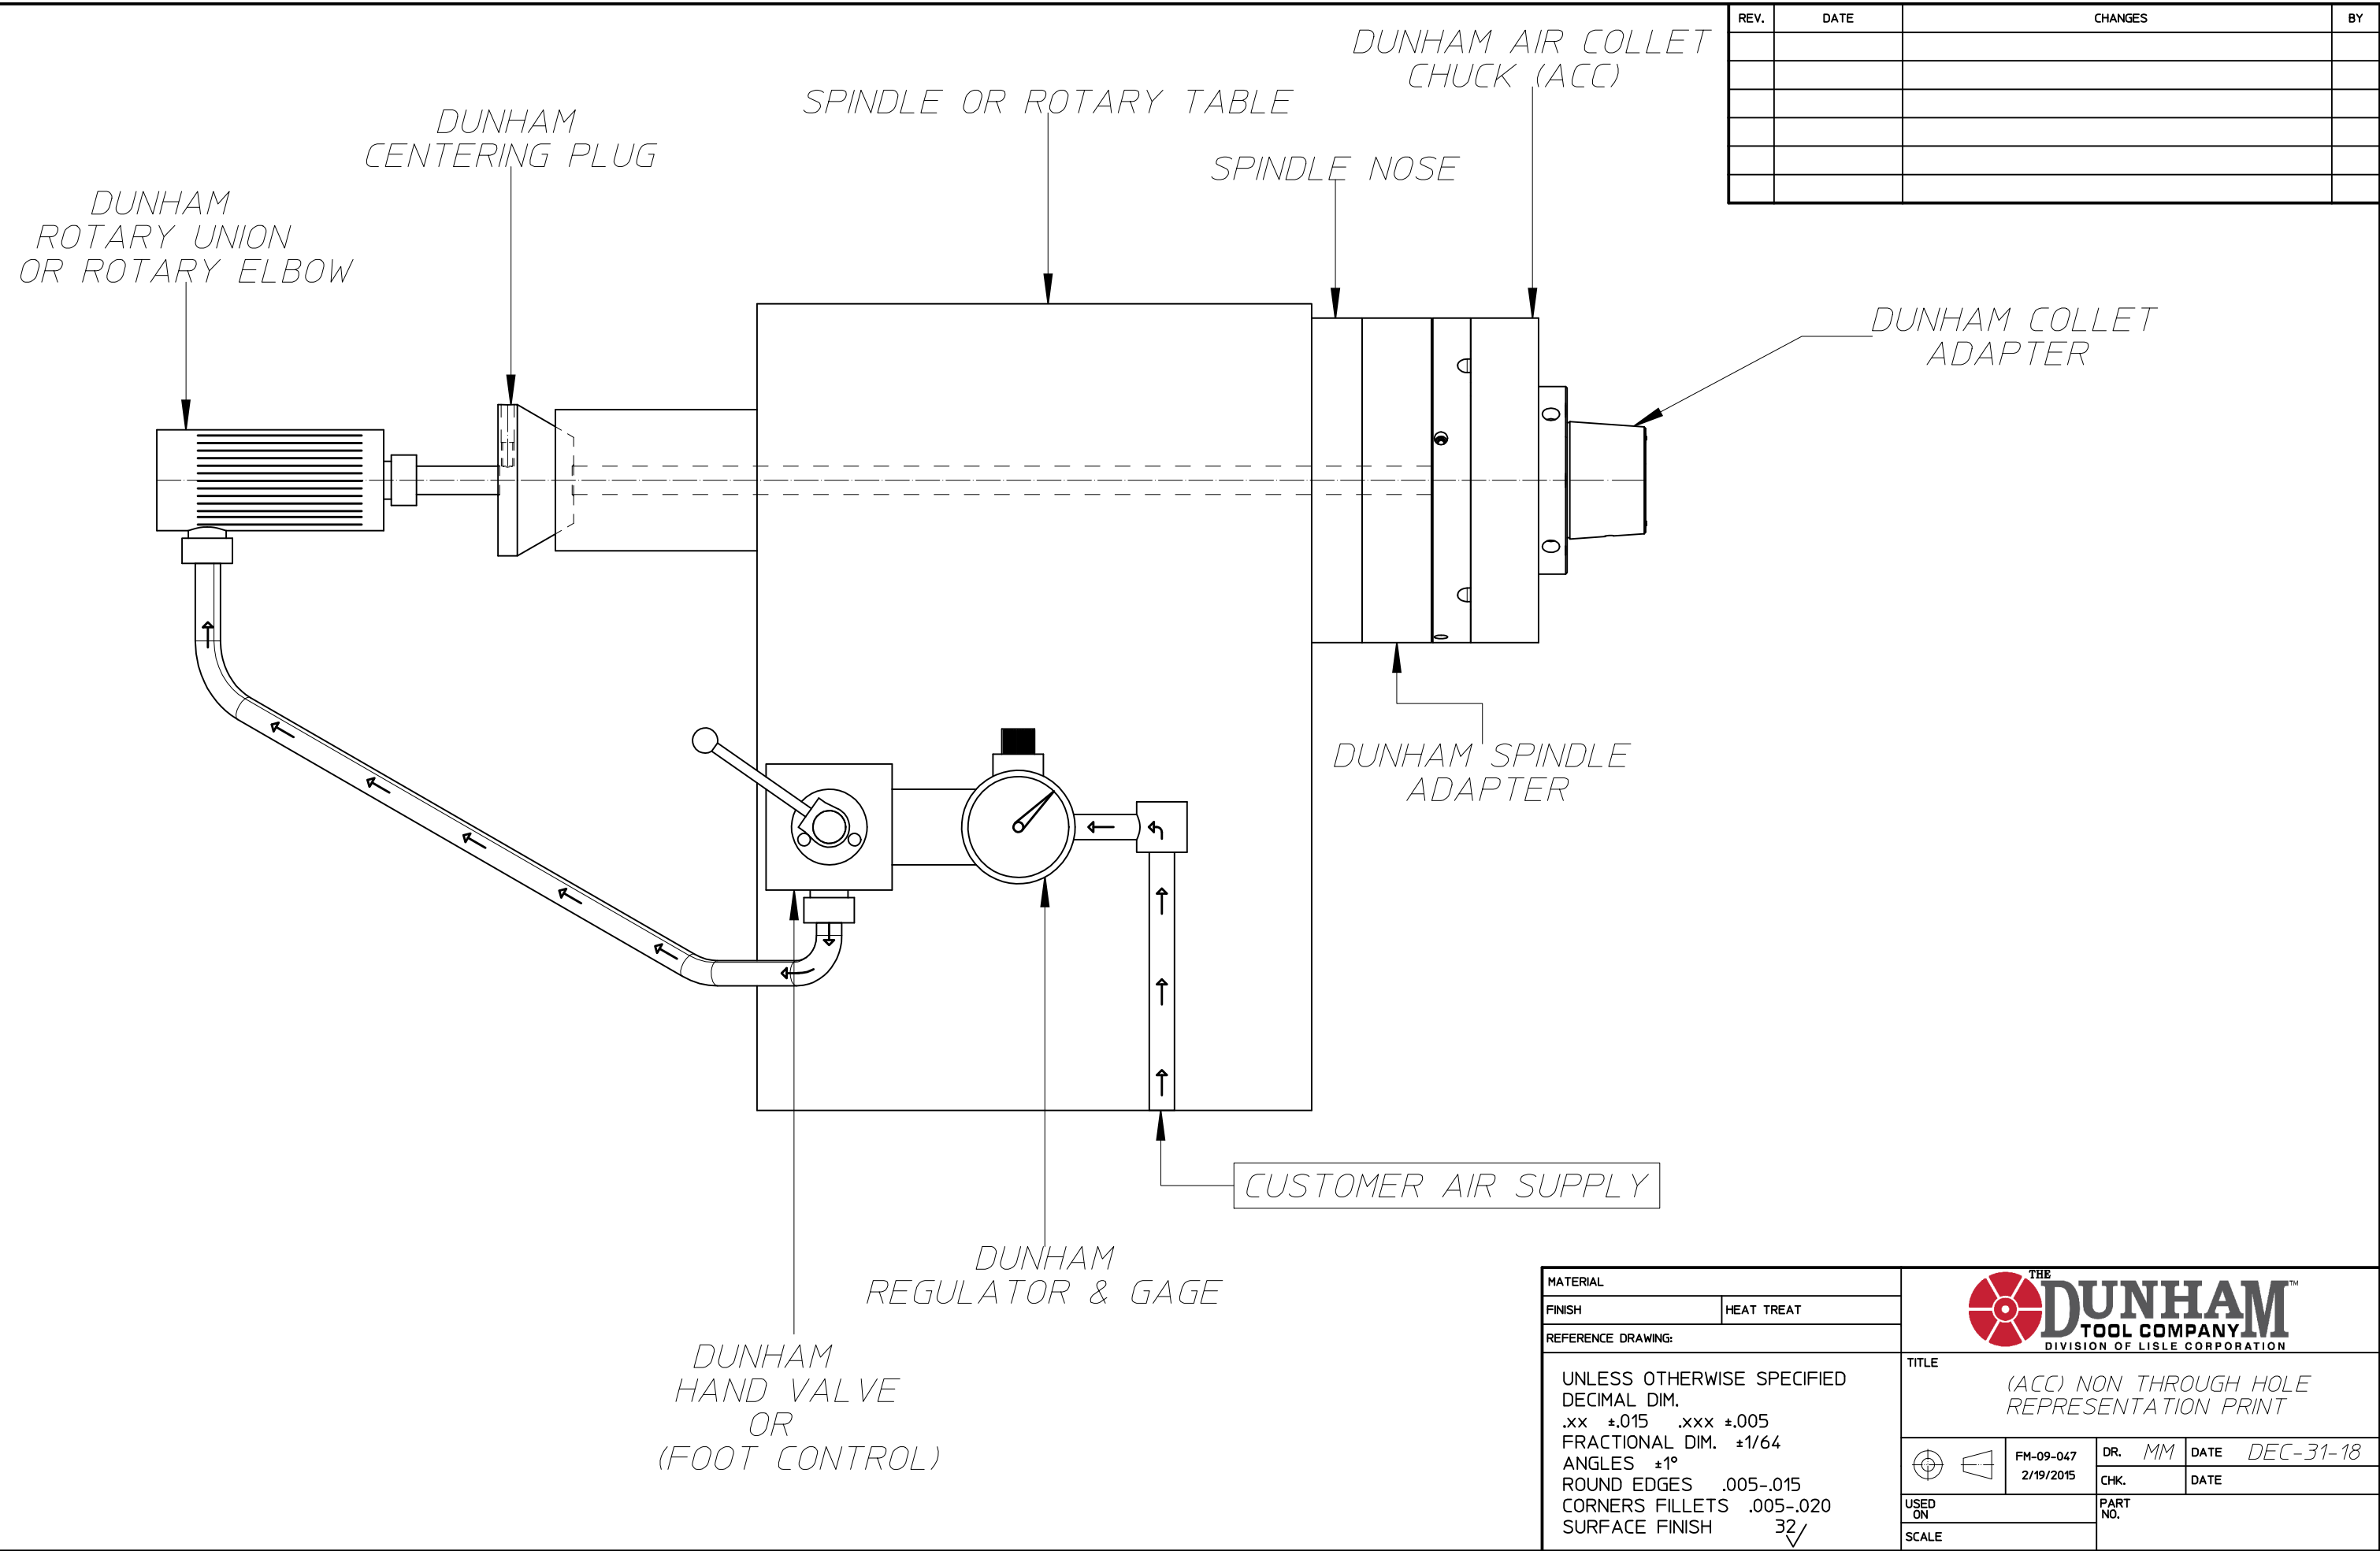


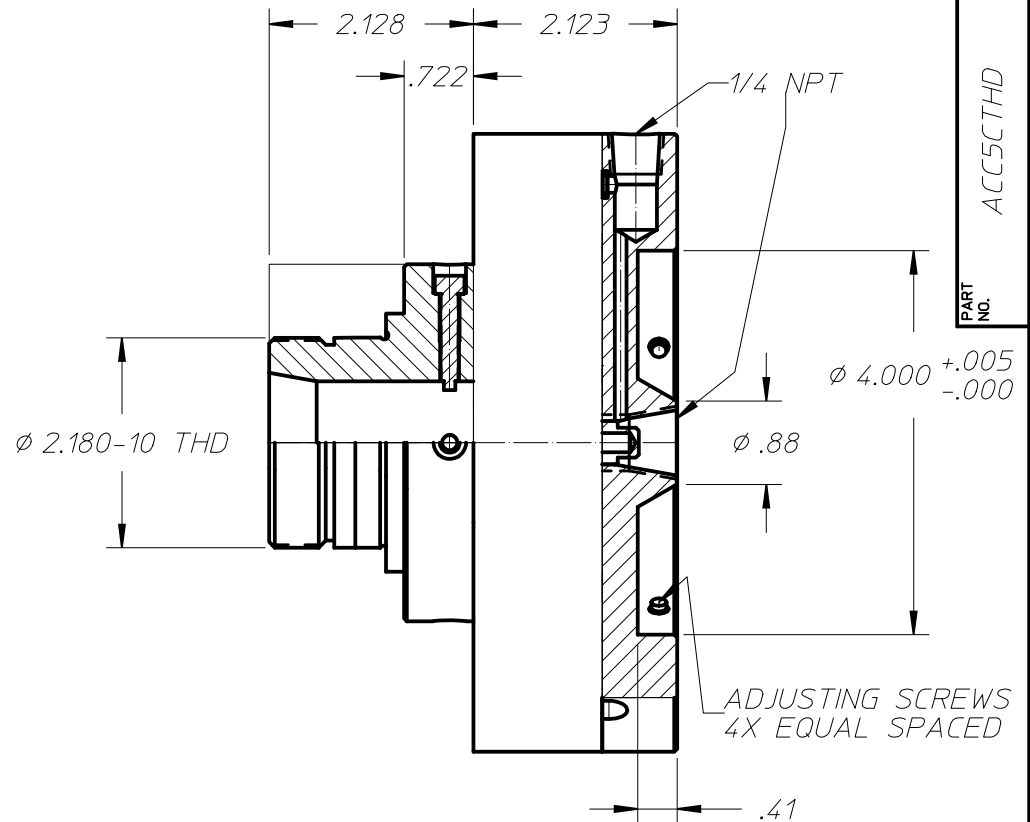

MATERIAL		THE DUNHAM TOOL COMPANY DIVISION OF LISLE CORPORATION			
FINISH	HEAT TREAT				
REFERENCE DRAWING:		TITLE			
UNLESS OTHERWISE SPECIFIED DECIMAL DIM. .xx ±.015 .xxx ±.005 FRACTIONAL DIM. ±1/64 ANGLES ±1° ROUND EDGES .005-.015 CORNERS FILLETS .005-.020 SURFACE FINISH 32✓		(ACC) NON THROUGH HOLE REPRESENTATION PRINT			
				FM-09-047 2/19/2015	DR. MM CHK. DATE DEC-31-18
		USED ON		PART NO.	
		SCALE			

CLEARANCE FOR 5/16
 SOCKET HEAD CAP SCREWS
 4X EQUAL SPACED
 Ø5.625 B.C.
 FOR MOUNTING

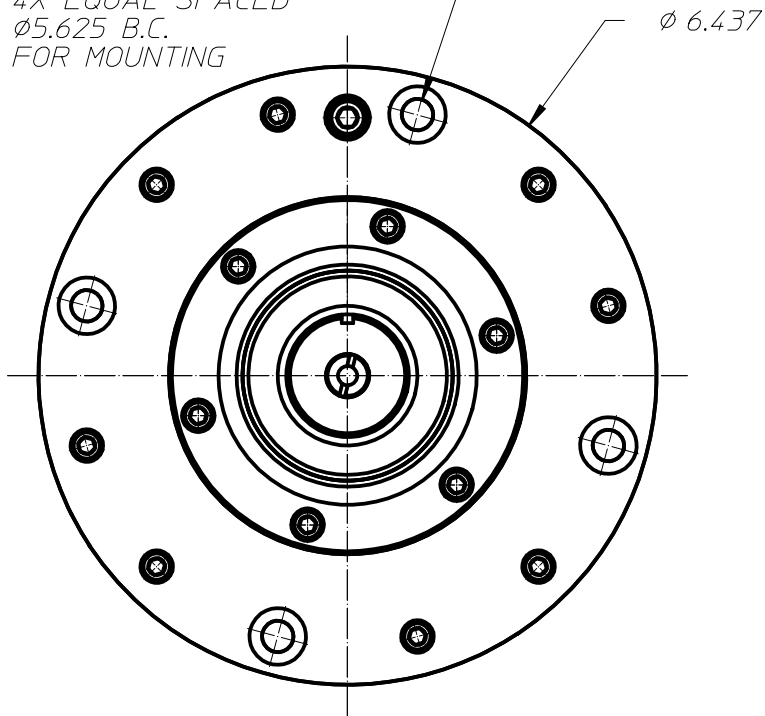

PART
 NO. ACC5CTHD

CLOSING FORCE = 11X LINE PRESSURE
 OPENING FORCE = 425 LBS
 MAX STROKE = .20

REV.	DATE	CHANGES	BY

MATERIAL		THE DUNHAMTM TOOL COMPANY DIVISION OF LISLE CORPORATION			
FINISH	HEAT TREAT				
REFERENCE DRAWING:					
UNLESS OTHERWISE SPECIFIED DECIMAL DIM. .xx ±.015 .xxx ±.005 FRACTIONAL DIM. ±1/64 ANGLES ±1° ROUND EDGES .005-.015 CORNERS FILLETS .005-.020 SURFACE FINISH 32✓		TITLE CUSTOMER AIR COLLET CHUCK w/5C 2-3/16-10 THD			
		 	FM-09-047 2/19/2015	DR. MM	DATE DEC-13-19
		USED ON		CHK.	DATE
		SCALE		PART NO. ACC5CTHD	